


ML520/ML521 ELITE DOT MATRIX PRINTER

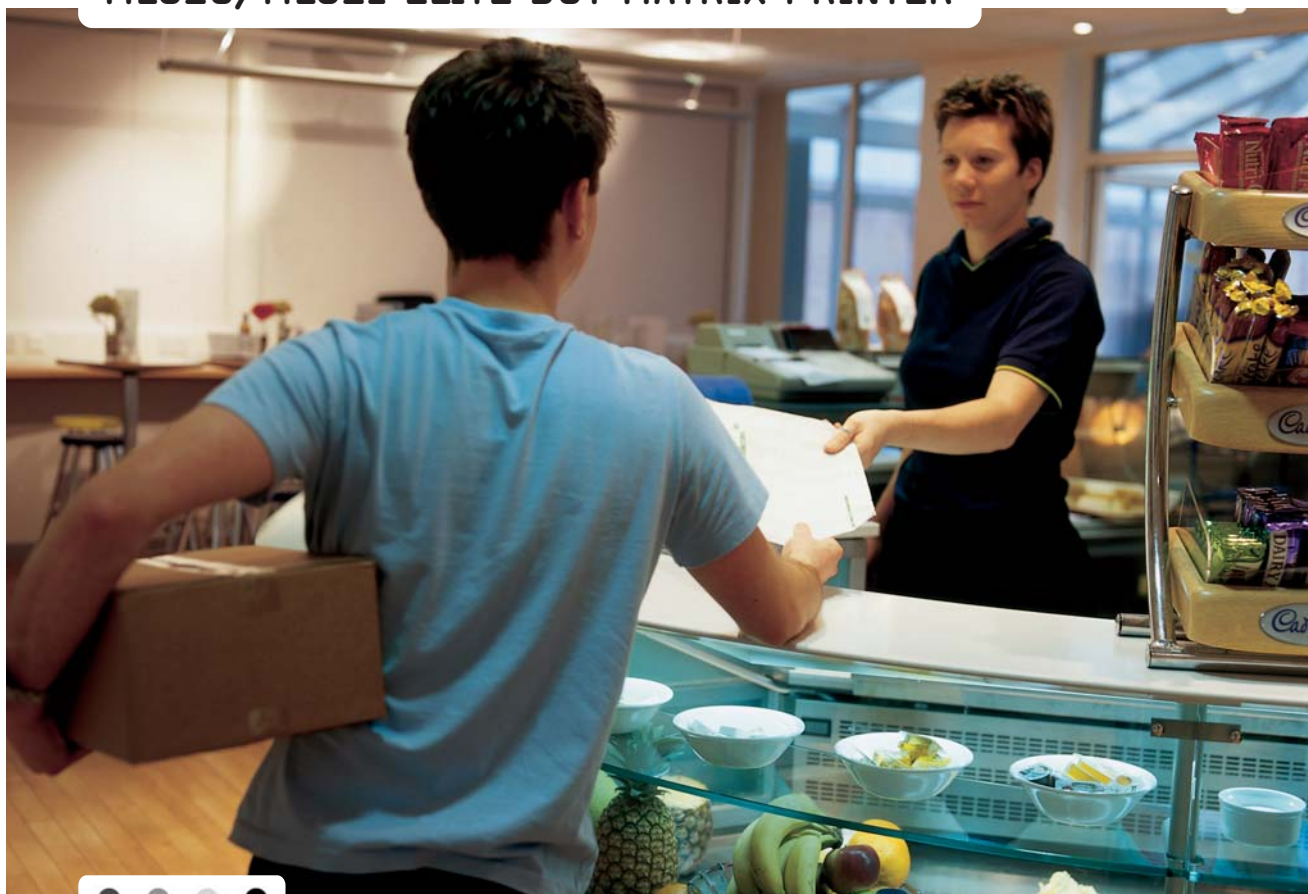

- ❖ **ML520 ELITE**
- ❖ **ML521 ELITE**
- ❖ **9-PIN DOT MATRIX PRINTER**

INTELLIGENT DESIGN AND OKISmart® PAPER-HANDLING

The first of a new breed of printers, the ML520/ML521 Elite narrow and wide carriage models, feature OkiSmart® advanced paper-handling technology making them a leading force as some of the fastest and most flexible printers in the dot matrix market.

MAIN FEATURES OF THE ML520/ML521 PRINTER

- ❖ 80/136 column dot matrix printers
- ❖ 9-pin print head with OkiSmart® print head (automatically variable head-gap and forms adjustment)
- ❖ Up to 433 characters per second print speed
- ❖ Multi-part paper-handling (original + 4 copies) and easy switching between multiple paper types
- ❖ High speed printing for general use - multi-part forms, listings and data processing



OKI

ML520/ML521 ELITE DOT MATRIX PRINTER

PRODUCT SPECIFICATION

		ML520 ELITE	ML521 ELITE
General	Number of pins	9	
	No. of multi-part forms	5 (one original + 4 copies)	
Speed & throughput	High speed draft (12cpi & 10cpi)	433cps	
	Utility (12cpi & 10cpi)	325cps	
	Near letter quality (12cpi & 10cpi)	81cps	
	Fastest print speed (10cpi)	433cps	
Font & print features	Carriage width (10cpi)	80 columns	136 columns
	Max. in compressed mode	160 columns	272 columns
	Character pitch	10/12/15/17.1/20 pitch & proportional	
	Graphics resolution	Up to 240 x 216 dpi	
	Typeface & Font	NLQ-Courier, NLQ-Gothic, OCR-B, High Speed Draft, Utility + Barcodes	
	Typestyle	Emphasised, Enhanced, Double Width, Double Height, Italics, Bold, Superscript, Subscript, Underline, Overscore	
Emulations & interfaces	Printer emulations	Epson FX, IBM ProPrinter/Graphics, Oki MicroLine	
	Standard interfaces	Centronics Parallel	
	Optional interfaces	Serial RS 232C/RS 422A/Current Loop	
Paper-handling	Continuous paper	76 — 254mm	76 — 406mm
	Continuous envelope	165 x 91mm	239 x 102mm
	First printable line (from top of page)	8.9mm	
	Standard	Paper parking, Zero tear-off, Autoload single sheet, Rear push tractor	
	Optional	Pull tractors, Single/dual bin sheet feeder, Roll paper stand (ML520 Elite only), Bottom tractors with stand and zero tear-off	
Physical	Dimensions (HxWxD)	165 x 431 x 380mm	165 x 585 x 380mm
	Weight	8kg	10.5kg
	Memory	Standard buffer 64KB	
	Noise level	57dB(A)/52dB(A) quiet mode	
Power	Power requirements	230V AC	
	Frequency	50/60Hz	
Reliability	Print head life	200 million characters	
	Ribbon life	4 million characters (re-inking cartridge)	
Supplies life	MTBF	6,000 hours	

OKI

Okidata Network Solutions
for a Global Society

OKI EUROPE, PART OF OKI ELECTRIC

OKI EUROPE LTD,
CENTRAL HOUSE, BALFOUR ROAD,
HOUSLOW, MIDDLESEX, TW3 1HY,
UNITED KINGDOM
TEL: +44 (0)20 8219 2190
FAX: +44 (0)20 8219 2199
WWW.OKIEUROPE.COM



As an ENERGY STAR Partner, Okidata Europe Ltd has determined that this product meets the ENERGY STAR guidelines for energy efficiency

© 2003 Okidata Europe Ltd.